




3600-DVTR24N
DIRECT VENT
Z/C FIREPLACE



3600-DVTR24N with Black Arched Front

WWW.ARCHGARD.COM

LOUVRES & FRONTS

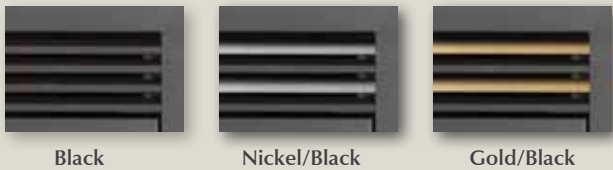

Black

Nickel/Black

Gold/Black



Black Arch Front

Sunburst, Top & Bottom

PANELS




Quebec City Gray Brick Panels


Reflective Glass Panels

Quebec City Red Brick Panels


TOP VIEW



SIDE VIEW



CORNER FRAMING



Corner framing dimensions for 3600-DVTR24N

- D = 35-3/8" (897mm)
- E = 25-1/2" (648mm)
- F = 36-1/2" (927mm)
- G = 48-3/4" (1238mm)

WHY CHOOSE AN ARCHGARD FIREPLACE?

- ~ Incredibly Realistic Logs and Flame
- ~ Quality Fit and Finish
- ~ Range of Stylish Design Options
- ~ Limited Lifetime Warranty
- ~ North American Made

SPECIFICATIONS

INPUT RATING

NATURAL GAS 17,000 - 24,000 BTU/HR
4.98 - 7.03 KW/HR

PROPANE 19,000 - 24,000 BTU/HR
5.57 - 7.03 KW/HR

EFFICIENCIES STEADY STATE 87%
AFUE 76%
P4 63.43%

VIEWING AREA H 20" x W 31"

STANDARD FEATURES

CERAMIC GLASS INCLUDED

BURNER TYPE WALL TO WALL STEEL PAN
w/LIFETIME WARRANTY

FIREBOX CONSTRUCTION WELDED/RIVET AND
GASKET SILICONE FREE

WARRANTY LIMITED LIFETIME

FAN KIT INCLUDED

OPTIONS

INTERIOR LINING OPTIONAL

CHOICE OF THREE STYLES: QUEBEC CITY GRAY BRICK, QUEBEC CITY RED BRICK & REFLECTIVE GLASS PANELS

PROPANE CONVERSION KIT OPTIONAL

CLEARANCE TO COMBUSTIBLES

FRAMING DIMENSIONS H 33 3/4" x W 36 1/2" D 16 1/2"

MANTLE CLEARANCE FROM BOTTOM 38" (965 mm)
(FROM BOTTOM OF UNIT TO BOTTOM OF 8" MANTLE)

TESTED AND APPROVED TO CANADIAN AND AMERICAN STANDARDS,
ANSI Z21.88B-2003/CSA 2.33B-2003 AND CAN/CGA-2.17-M91



www.archgard.com
Made in Canada

