



45-DVFS28N  
FREE STANDING  
DIRECT VENT FIREPLACE



45-DVFS28N with Brushed Nickel Overlay  
and Brushed Nickel Grills

[WWW.ARCHGARD.COM](http://WWW.ARCHGARD.COM)

DOORS & GRILLS




Brushed Nickel Overlay w/ Brushed Nickel Grills



Gold Overlay w/ Gold Grills




Black Bay Door with Black Grills (Standard)

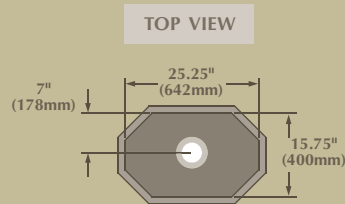

WHY CHOOSE AN ARCHGARD FIREPLACE:

- ~ Incredibly Realistic Logs and Flame
- ~ Quality Fit and Finish
- ~ User Friendly Control Panel
- ~ Wall to Wall Flame
- ~ Limited Lifetime Warranty

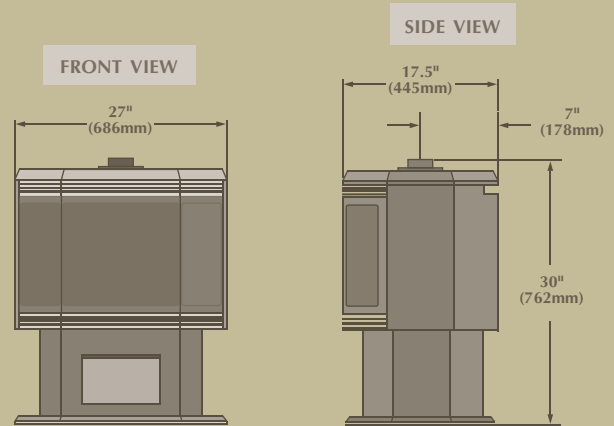

PANELS



Quebec City Grey Brick Panels



Quebec City Red Brick Panels



Reflective Glass Panels

CLEARANCES

SIDE	11" (254MM)
BACK	4" (102MM)
CORNER	4" (102MM)
TOP	24" (610MM)
FLOOR	0"

SPECIFICATIONS

INPUT RATING

NATURAL GAS	18,750 - 28,000 BTU/HR 5.5 - 8.2 KW/HR
PROPANE	19,600 - 28,000 BTU/HR 5.7 - 8.2 KW/HR

EFFICIENCIES

STEADY STATE 82%  
AFUE 72%  
P4 58.98%

MINIMUM CHIMNEY HEIGHT FROM TOP OF UNIT TO CENTER OF ELBOW ON HORIZONTAL TERMINATION 36"


STANDARD FEATURES

- VARIABLE SPEED FAN
- CERAMIC GLASS
- WALL TO WALL STEEL PAN BURNER WITH LIFETIME WARRANTY
- FIREBOX CONSTRUCTION WELDED/RIVET AND GASKET SILICONE FREE

OPTIONS

- INTERIOR BRICK LINING
- REFLECTIVE GLASS PANELS
- PROPANE CONVERSION KIT

TESTED AND APPROVED TO CANADIAN AND AMERICAN STANDARDS, ANSI Z21.88B-2003/CSA 2.33B-2003 AND CAN/CGA-2.17-M91



Dimensions may change at the discretion of the manufacturer



www.archgard.com  
Made in Canada

